




## Dual-Output Off-Grid Solar Power Mini-Inverter Twin Pack



- **Dual Output Ports**
- **Specially Designed for Powering Electric Water Heaters in Off-Grid Mode 1 or AC Loads in Mode 2**
- **Total 8 DC Input Channels with Solar or Battery Input**
- **MPPT for Each Solar Panel**
- **Pure Sinewave AC Outputs**
- **Solar or Battery Auto-Detection**
- **Battery Over Discharge Protection**
- **High Efficiency and Long Life**


One Master (CIM-1200H/T1) & one Slave (CIM-1200H/T2) CyboInverters can daisy-chain, power 2000W-4500W heating elements or resistive loads through its H Output Port in Off-Grid Mode 1, or produce up to 2500W, 230V, 50Hz AC to run AC loads through its T Output Port in Off-Grid Mode 2.

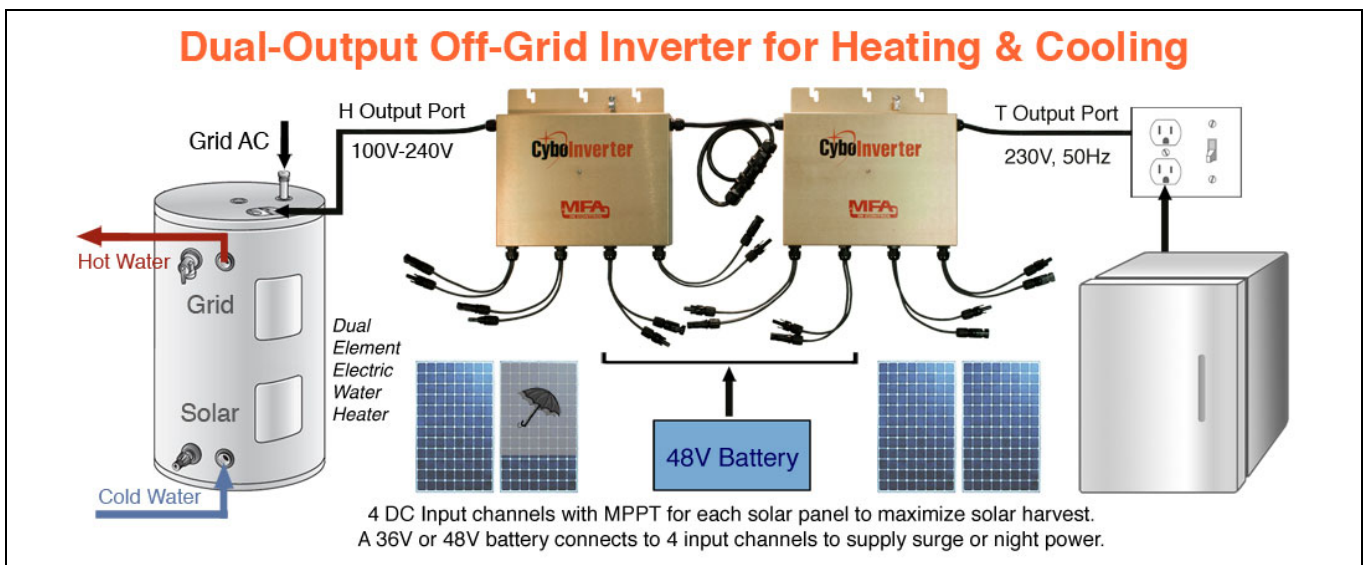

**Product: 2.5KW Dual-Output Off-Grid CyboInverter Twin Pack for Microgrids**  
**CIM-1200H/T1, H/T2**      **H Port: 100V-240V, T Output Port: 230V, 50Hz**

**Made in U.S.A.**

## Technical Data of CIM-1200H/T1, H/T2 (Rev 6.6 – Jan 2024)

DC Input (per Channel)	60/66 Cell Panel	72 Cell Panel*	Battery
Supported Input Power	250W – 400W	300W – 450W	48V, 50-300AH
Operating Input DC Voltage Range	18V – 60V	18V – 60V	47V – 60V
Peak Power Performance Range	30V – 60V	30V – 60V	48V – 60V
Maximum Input DC Voltage / Current	60V / 11.5A	60V / 11.5A	60V / 11.5A
Maximum Input Power	330W	330W	330W
Minimum Starting Voltage	20V	20V	47V
Compatible Batteries	48V Lead-Acid Deep-Cycle AGM or Lithium-Ion Pack		
AC Output (per Inverter)	H Output Port	T Output Port	
Rated Output Power / Peak Output Power	960W / 1250W	960W / 1250W	
Nominal Output Current (RMS)	4A – 8A	4.17A	
Maximum Output Current (RMS)	10.5A	6.0A	
Nominal Output Voltage / Range	100V – 240V (10V – 264V)	230V (207V – 253V)	
Nominal Frequency / Range	50Hz (49.5 – 50.5) Hz	50Hz (49.5 – 50.5) Hz	
Compatible Water Heaters or Heating Elements	2KW – 4.5KW, 240V Heating Elements for the Twin Pack		
Efficiency	Data		
Peak Efficiency / Solar MPPT Tracking	96% / 99%		
Mechanical Data	SI	U.S.	
Ambient Temperature Range	-40°C to +65°C	-40°F to +149°F	
Internal Operating Temperature Range	-40°C to +88°C	-40°F to +190°F	
Dimensions w/o mounting bracket (L x H x W)	32cm x 24cm x 5.8cm	12.5" x 9.5" x 2.3"	
Weight	6.5 kg	14.25 lbs	
Cooling / Enclosure	Natural Convection, No Fan / Potted		
DC Wire / AC Wire	1-2 Feet DC Wires / 16 Feet AC Wires (THHN), Copper		
Compliance and Features	Data		
Safety and EMC Compliance	UL1741 and IEEE1547 (E113426), FCC Part 15 Class A		
Rapid Shutdown	Complies with NEC 2014/2017 690.12.		
DC Ground Fault Detector Interrupter (GFDI)	Built-In		
Standard Warranty	3 Years (Extended Warranty Available)		
Enclosure Environmental Rating / Safety	Outdoor, NEMA 6 (IP67) / Transformer Isolated Circuits		
Built-in Battery Over Discharge Protection	Low Voltage Disconnect (LVD) on Battery Channels.		

\*Do not use 72-cell solar panels in areas where temperature can get below -10 degrees F (-23 degrees C).