




The World's First **Battery-less Off-Grid Solar Inverter for Air Conditioners**



- For Inverter-Air-Conditioners (IAC), Requiring no Batteries
- Supports 9000 to 24000 Btu IAC
- Pure Sinewave AC Output
- Four DC Input Channels
- MPPT for Each Solar Panel
- Over Discharge Protection for 48V Lead-Acid Batteries
- Solar or Battery Auto-Detection
- High Efficiency and Long Life

One Master (CI-Mini-1000W1x) & Slave (CI-Mini-1000W2x) off-grid CyboInverter can daisy-chain, and produce up to 2500W, 220V, 60Hz AC to run Mini-Split or Window IAC and other 220V loads.

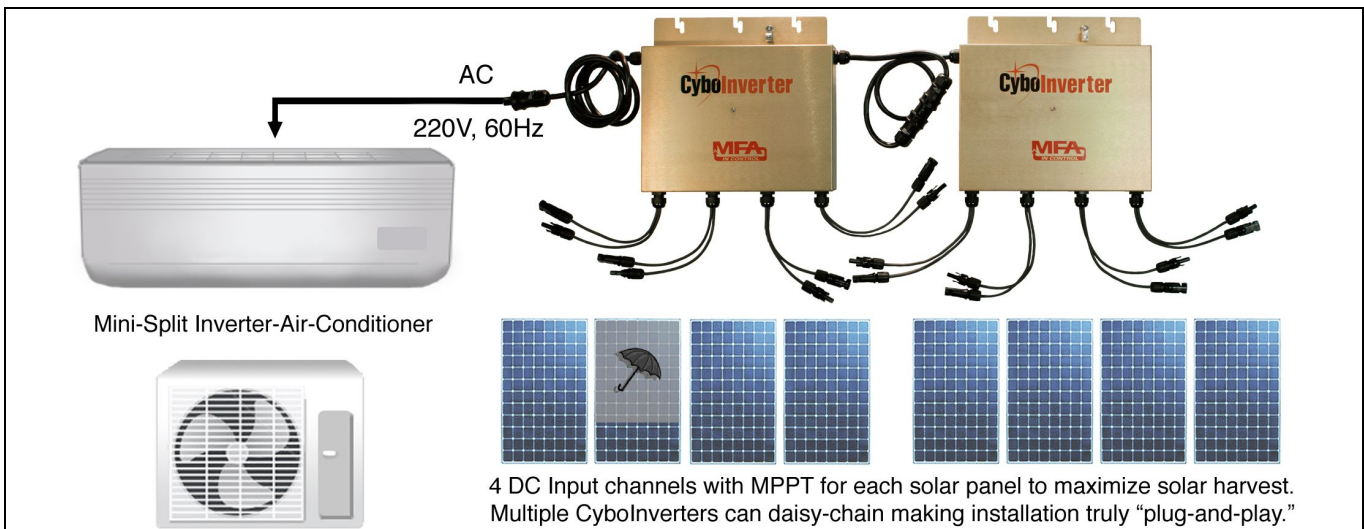


Product: Off-Grid CyboInverter Twin Pack for Mini-Split IAC and Other Loads
Part No: CI-Mini-1000W1x / W2x, Daisy-Chained Off-Grid Model, 220V, 60Hz AC

Never connect the Off-Grid CyboInverter to the AC grid. Doing so will damage the unit and void the warranty. Check voltage and current specs of A/C Unit before attaching.

Made in U.S.A.

Technical Data of CI-Mini-1000W1x and W2x (Rev 6.6 – Jan 2024)

DC Input (per Channel)	60/66 Cell Panel	72 Cell Panel*	Battery
Supported Input Power	250W – 400W	300W – 450W	48V, 50-300AH
Operating Input DC Voltage Range	18V – 60V	18V – 60V	47V – 60V
Peak Power Performance Range	30V – 60V	30V – 60V	48V – 60V
Maximum Input DC Voltage / Current	60V / 11.5A	60V / 11.5A	60V / 11.5A
Maximum Input Power	330W	330W	330W
Minimum Starting Voltage	20V	20V	47V
Compatible Batteries	48V Lead-Acid Deep-Cycle AGM or Lithium-Ion Pack		
AC Output (per Inverter)	Data		
Rated Output Power / Peak Output Power	960W / 1250W		
Startup Surge Power for 12 Seconds	1500W (Max Surge DC Power = 400W per Channel)		
Nominal Output Current (RMS)	4.36A (RMS – Root Mean Square)		
Nominal Output Voltage / Range	220V (155V – 242V, Single-Phase)		
Nominal Frequency / Range	60Hz (59.5Hz – 60.5Hz)		
Power Factor	>0.95		
Efficiency	Data		
Peak Efficiency / MPPT Tracking	96% (99%)		
Mechanical Data	SI	U.S.	
Ambient Temperature Range	-40°C to +65°C	-40°F to +149°F	
Internal Operating Temperature Range	-40°C to +88°C	-40°F to +190°F	
Dimensions w/o mounting bracket (L x H x W)	32cm x 24cm x 5.8cm	12.5” x 9.5” x 2.3”	
Weight	6.5 kg	14.25 lbs	
Cooling / Enclosure	Natural Convection, No Fan / Potted		
DC Wire / AC Wire	1-2 Feet DC Wires / 12 Feet AC Wires (THHN), Copper		
Features and Compliance	Data		
Safety and EMC Compliance	UL1741 and IEEE1547 (E113426), FCC Part 15 Class A		
Rapid Shutdown	Complies with NEC 2014/2017 690.12.		
DC Ground Fault Detector Interrupter (GFDI)	Built-In		
Standard Warranty	3 Years (Extended Warranty Available)		
Enclosure Environmental Rating / Safety	Outdoor – NEMA 6 / Transformer Isolated Circuits		
Built-in Battery Over Discharge Protection	Low Voltage Disconnect (LVD) on Battery Channels.		

*Do not use 72-cell solar panels in areas where temperature can get below -10 degrees F (-23 degrees C).